




1. REMOVE NUT AND WASHER

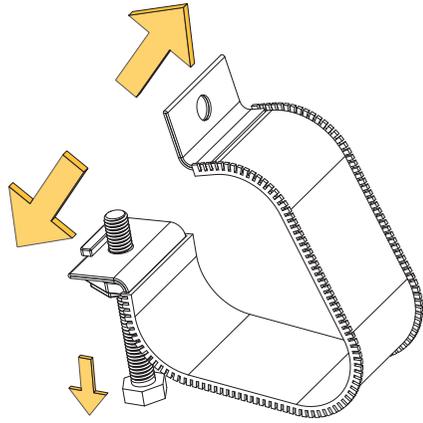

2. OPEN RESTRAINT & LOWER MOUTH BOLT

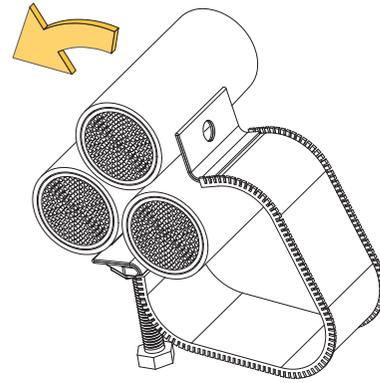

3. POSITION RESTRAINT AROUND CABLES

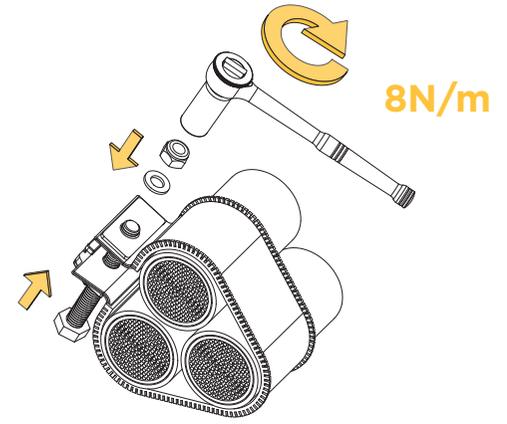

4. RAISE MOUTH BOLT AND TIGHTEN




SECURING CABLES WORLDWIDE

Cable Cleat Specification

Name	Type	Material	Certification	Size Range	Temp Range	Liner Type	Bolt(s)
TREFOIL INTERMEDIATE RESTRAINT	SDSSIR	Stainless Steel	IEC 61914	19 - 130 mm in 28 sizes Trefoil Formation	-50°C to +60°C	Low Smoke & Fume (LSF) Zero Halogen (LSOH) & Phosphorus Free Polymer	No fixings required

All products are short-circuit tested. Please visit www.cmp-products.com for further details.

TREFOIL INTERMEDIATE RESTRAINT

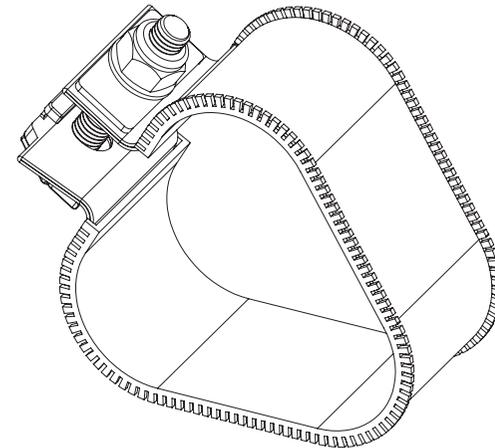

PPE



CAUTION: We strongly recommend wearing suitable PPE including anti cut gloves.

Please refer to local PPE regulations.

www.cmp-products.com

Tel: +44 (0) 191 265 7411

Fax: +44 (0) 1670 715 646

E-mail: customerservices@cmp-products.com

© Copyright CMP Products Limited 2017. All rights reserved.

FI544 REV 1 10/20



GLOBAL



CLEAT FITTING INSTRUCTIONS