



- The latest generation of audible and visual alarm devices
- Ex d/Ex e connection chambers
- Visual solutions with 5 to 21 J XENON and high-power LEDs with various light modes and 4 light channels
- Audible solutions with directional or omnidirectional horn with up to 120 dB(A) at 1 m, 4 tone channels and 64 preconfigured tones
- Four output levels can be configured
- Brackets, fixings and protective grid made from stainless steel
- Compliant with EN 54/DNV
- Fastening bracket and protective cage included

E5

## MY R. STAHL YL60C



The **YL60/3 product series** provides audible and visual alarm signals which can be used to alert, warn or draw attention to equipment malfunction/start-up or any number of safety-related issues in hazardous areas. The preconfigured signal tones and light patterns (LED) provide a wide range of internationally standardised signal patterns. The audible and visual signals can be operated separately or in combination, with four channels available for each type of signal, enabling flexible use. The signalling devices meet the requirements of EN 54 and DNV for extremely challenging ambient conditions.

	IECEX / ATEX					
Zone	0	1	2	20	21	22
Installation in		•	•		•	•

Selection Table					
Lamp Horn version Sound pressure level	5 J xenon flash tubes directional max. 120 dB(A) @ 1 m				
Lens colour	Rated operational voltage DC	Product Type	Art. No.	Weight	
Amber	12 ... 27.2 V	YL60/324-DL101-00AW30-ST000-0000	319424	8.39 kg	
	133 ... 272 V	YL60/324-PL101-00AW30-ST000-0000	319432	8.56 kg	
Blue	12 ... 27.2 V	YL60/324-DL101-00BW30-ST000-0000	319425	8.39 kg	
	133 ... 272 V	YL60/324-PL101-00BW30-ST000-0000	319433	8.56 kg	
Clear	12 ... 27.2 V	YL60/324-DL101-00CW30-ST000-0000	319426	8.39 kg	
	133 ... 272 V	YL60/324-PL101-00CW30-ST000-0000	319367	8.56 kg	
Green	12 ... 27.2 V	YL60/324-DL101-00GW30-ST000-0000	319427	8.39 kg	
	133 ... 272 V	YL60/324-PL101-00GW30-ST000-0000	319368	8.56 kg	
Red	12 ... 27.2 V	YL60/324-DL101-00RW30-ST000-0000	319428	8.39 kg	
	133 ... 272 V	YL60/324-PL101-00RW30-ST000-0000	319369	8.56 kg	
Lamp Horn version Sound pressure level	5 J xenon flash tubes omnidirectional max. 114 dB(A) @ 1 m				
Lens colour	Rated operational voltage DC	Product Type	Art. No.	Weight	
Amber	12 ... 27.2 V	YL60/324-DS101-00AW30-ST000-0000	312358	6.54 kg	
	133 ... 272 V	YL60/324-PS101-00AW30-ST000-0000	319370	6.72 kg	

**Selection Table**

Lens colour	Rated operational voltage DC	Product Type	Art. No.	Weight
<b>Lamp</b> Horn version Sound pressure level				
5 J xenon flash tubes omnidirectional max. 114 dB(A) @ 1 m				
Blue	12 ... 27.2 V	YL60/324-DS101-00BW30-ST000-0000	319429	6.54 kg
	133 ... 272 V	YL60/324-PS101-00BW30-ST000-0000	319411	6.72 kg
Clear	12 ... 27.2 V	YL60/324-DS101-00CW30-ST000-0000	319430	6.54 kg
	133 ... 272 V	YL60/324-PS101-00CW30-ST000-0000	319412	6.72 kg
Green	12 ... 27.2 V	YL60/324-DS101-00GW30-ST000-0000	319431	6.54 kg
	133 ... 272 V	YL60/324-PS101-00GW30-ST000-0000	319413	6.72 kg
Red	12 ... 27.2 V	YL60/324-DS101-00RW30-ST000-0000	312360	6.54 kg
	133 ... 272 V	YL60/324-PS101-00RW30-ST000-0000	319414	6.72 kg
<b>Lamp</b> Horn version Sound pressure level				
LED dome light fitting directional max. 120 dB(A) @ 1 m				
Amber	21.1 ... 27.2 V	YL60/326-DL801-00AW30-ST000-0000	319415	8.43 kg
	133 ... 272 V	YL60/326-PL801-00AW30-ST000-0000	319443	8.61 kg
Blue	21.1 ... 27.2 V	YL60/326-DL801-00BW30-ST000-0000	319416	8.43 kg
	133 ... 272 V	YL60/326-PL801-00BW30-ST000-0000	319444	8.61 kg
Clear	21.1 ... 27.2 V	YL60/326-DL801-00CW30-ST000-0000	319417	8.43 kg
	133 ... 272 V	YL60/326-PL801-00CW30-ST000-0000	319445	8.61 kg
Green	21.1 ... 27.2 V	YL60/326-DL801-00GW30-ST000-0000	319418	8.43 kg
	133 ... 272 V	YL60/326-PL801-00GW30-ST000-0000	319446	8.61 kg
Red	21.1 ... 27.2 V	YL60/326-DL801-00RR30-ST000-0000	319419	8.43 kg
	133 ... 272 V	YL60/326-PL801-00RR30-ST000-0000	319447	8.61 kg
<b>Lamp</b> Horn version Sound pressure level				
LED dome light fitting omnidirectional max. 114 dB(A) @ 1 m				
Amber	21.1 ... 27.2 V	YL60/326-DS801-00AW30-ST000-0000	312371	6.58 kg
	133 ... 272 V	YL60/326-PS801-00AW30-ST000-0000	319448	6.76 kg
Blue	21.1 ... 27.2 V	YL60/326-DS801-00BW30-ST000-0000	319420	6.58 kg
	133 ... 272 V	YL60/326-PS801-00BW30-ST000-0000	319449	6.76 kg
Clear	21.1 ... 27.2 V	YL60/326-DS801-00CW30-ST000-0000	319441	6.58 kg
	133 ... 272 V	YL60/326-PS801-00CW30-ST000-0000	319450	6.76 kg
Green	21.1 ... 27.2 V	YL60/326-DS801-00GW30-ST000-0000	319442	6.58 kg
	133 ... 272 V	YL60/326-PS801-00GW30-ST000-0000	319451	6.76 kg
Red	21.1 ... 27.2 V	YL60/326-DS801-00RR30-ST000-0000	312359	6.58 kg
	133 ... 272 V	YL60/326-PS801-00RR30-ST000-0000	319452	6.76 kg






**Technical Data**






Variant	YL60/326 LED dome light fitting	YL60/324 xenon flash tubes
Explosion Protection		
Scope of validity	European Union (ATEX) IECEX United Kingdom	European Union (ATEX) IECEX United Kingdom
IECEX gas explosion protection	Ex db eb IIC T6 / T4 Gb	Ex db eb IIC T4 Gb




Technical Data		
Variant	YL60/326 LED dome light fitting	YL60/324 xenon flash tubes
<b>Explosion Protection</b>		
IECEx dust explosion protection	Ex tb IIIC T80 °C / T100 °C Db	Ex tb IIIC T100 °C Db
ATEX gas explosion protection	⊕ II 2 G Ex db eb IIC T6 / T4 Gb	⊕ II 2 G Ex db eb IIC T4 Gb
ATEX dust explosion protection	⊕ II 2 D Ex tb IIIC T80 °C / T100 °C Db	⊕ II 2 D Ex tb IIIC T100 °C Db
Declaration of Conformity	ATEX (EUK)	ATEX (EUK)
Certificates	ATEX (BVIS), IECEx (BVIS)	ATEX (BVIS), IECEx (BVIS)
<b>Electrical Data</b>		
Line monitoring	Yes	Yes
Tolerance	-10 ... 10 %	-10 ... 10 %
<b>Acoustic Data</b>		
Sound level	4	4
Volume control	Max. -18 dB(A) adjustment	Max. -18 dB(A) adjustment
<b>Ambient Conditions</b>		
Ambient temperature	-40 °C ... 40 °C (T6) -40 °C ... 70 °C (T4)	-40 °C ... 70 °C (T4)
Storage temperature	-60 °C ... 70 °C	-60 °C ... 70 °C
<b>Mechanical Data</b>		
IP degree of protection (IEC 60598)	IP66	IP66
Connection chamber version	Ex e	Ex e
Enclosure material	Aluminium, powder-coated, Seawater-resistant	Aluminium, powder-coated, Seawater-resistant
Enclosure colour	red, similar to RAL 3020	red, similar to RAL 3020
Silicone-free content	Contains silicone	Contains silicone
Trumpet material	PC/PBT	PC/PBT
Material dome	Polycarbonate, prismatic	Polycarbonate, prismatic
Protective collar material	Polycarbonate (PC cover)	Polycarbonate (PC cover)
Wire guard material	Stainless steel	Stainless steel
Max. solid connection terminals	4 mm <sup>2</sup>	4 mm <sup>2</sup>
Max. finely stranded connection terminals	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>
<b>Mounting / Installation</b>		
Mounting part material	Stainless steel	Stainless steel
Connection type	Push in	Push in
<b>Components</b>		
Drilled holes	2 x M20 + 2 x M25	2 x M20 + 2 x M25
Cable glands and entries	1 x M20 Ø 4 ... 13 mm 1 x M25 Ø 7 ...	1 x M20 Ø 4 ... 13 mm 1 x M25 Ø 7 ...
Stopping plugs	2x M20 + 2x M25	2x M20 + 2x M25

You can find more technical data online at [r-stahl.com](http://r-stahl.com). MY R. STAHL YL60C


Accessories			
Figure	Description	Art. No.	Weight
<b>Metal cable gland</b>			
	Ex d and Ex e cable gland with compound for all types of armoured cables (SWA, wire-braid, tape) (nickel-plated brass) Type 20PX2K, M20 x 1.5	109428	240 g
	Ex d and Ex e cable glands with RapidEx sealing system for all types of unarmoured cables and wire-braid-armoured cables (nickel-plated brass) Type 20PX2K-REX, M20 x 1.5	246649	240 g
	Ex d and Ex e cable glands with compound for all types of unarmoured cables and wire-braid-armoured cables (nickel-plated brass) Type 20PXSS2K, M20 x 1.5	109441	200 g
	Ex d and Ex e cable glands with RapidEx sealing system for all types of unarmoured cables and wire-braid-armoured cables (nickel-plated brass) Type 20PXSS2K-REX, M20 x 1.5	246605	200 g

Accessories				
Figure	Description	Art. No.	Weight	
Cable gland made of plastic				
	8161/7-M20-1304, Ex e Plastic, M20 x 1.5, cable outer diameter 4 to 13 mm Lot size 50 pieces	239156	13 g	
Stopping plug				
	8290/3-M20 Plastic, M20 x 1.5 Lot size 1 piece	143522	7 g	
	8290/3-M20 Plastic, M20 x 1.5 Lot size 100 pieces	285773	500 g	
Mounting accessories				
	L-bracket, stainless steel 1.4404	319271	-	
	U-bracket, stainless steel 1.4404	319280	-	
Protective cage				
	Protective cage, stainless steel 1.4404	319272	-	

Spare Parts				
Figure	Description	Art. No.	Weight	
Textured lens				
	amber	319273	-	
	blue	319274	-	
	green	319275	-	
	clear	319276	-	
	red	319278	-	

Spare Parts			
Figure	Description	Art. No.	Weight
<b>Lamp</b>			
	Xenon tube PCB 5 joules	319281	-
<b>Shaped horn</b>			
	directional, repair kit	319249	-
	omnidirectional, repair kit	319250	-

**Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations**

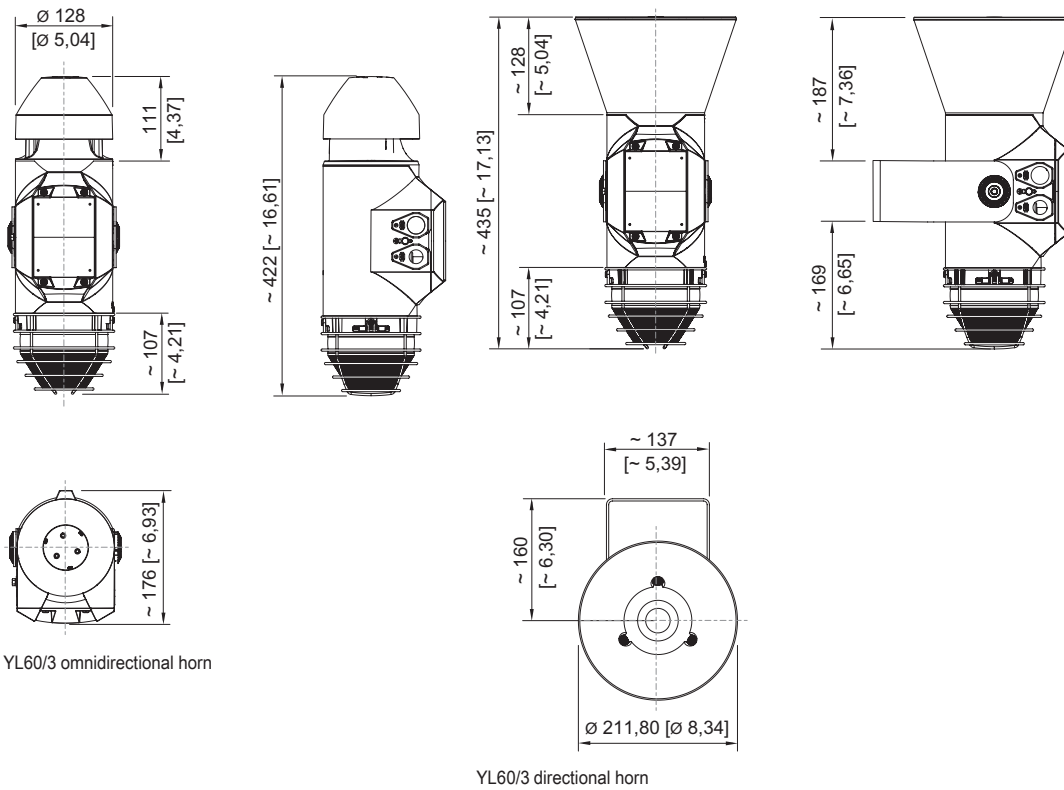

YL60/3 omnidirectional horn

YL60/3 directional horn